

Transceiver Module TCM 310 / 310C

July 5, 2012



Observe precautions! Electrostatic sensitive devices!

Patent protected:

WO98/36395, DE 100 25 561, DE 101 50 128,
WO 2004/051591, DE 103 01 678 A1, DE 10309334,
WO 04/109236, WO 05/096482, WO 02/095707,
US 6,747,573, US 7,019,241

REVISION HISTORY

The following major modifications and improvements have been made to the first version of this document:

No	Major Changes
1.00	Initial version
1.01	Modification for Step Code DB; increased number of filters and Smart Ack mail-boxes
1.02	Supply voltage range extended
1.03	Start-up time and current consumption in deep sleep mode added in 1.2; improved layout recommendations in 3.5
1.04	Antenna recommendations removed and referred to application note AN102 and AN105; Maximum Rating for IOVDD modified (IOVDD may now exceed VDD); Additional information in 3.6; Chapter "Related Documents" added; pin numbers added in 3.2; update of FCC grant in 5.2; parameters for antenna requirements relaxed in 4.2.1.;
1.05	Error in table in 3.2 corrected (pin 17 and 18 need to be connected to GND as shown in figure above)
1.06	Supply voltage range extended; start-up time from sleep added

**Published by EnOcean GmbH, Kolpingring 18a, 82041 Oberhaching, Germany
www.enocean.com, info@enocean.com, phone +49 (89) 6734 6890**

© EnOcean GmbH
All Rights Reserved

Important!

This information describes the type of component and shall not be considered as assured characteristics. No responsibility is assumed for possible omissions or inaccuracies. Circuitry and specifications are subject to change without notice. For the latest product specifications, refer to the EnOcean website: <http://www.enocean.com>.

As far as patents or other rights of third parties are concerned, liability is only assumed for modules, not for the described applications, processes and circuits.

EnOcean does not assume responsibility for use of modules described and limits its liability to the replacement of modules determined to be defective due to workmanship. Devices or systems containing RF components must meet the essential requirements of the local legal authorities.

The modules must not be used in any relation with equipment that supports, directly or indirectly, human health or life or with applications that can result in danger for people, animals or real value.

Components of the modules are considered and should be disposed of as hazardous waste. Local government regulations are to be observed.

Packing: Please use the recycling operators known to you.

TABLE OF CONTENT

1	RELATED DOCUMENTS	4
2	GENERAL DESCRIPTION	4
	2.1 Basic functionality	4
	2.2 Technical data	5
	2.3 Physical dimensions	5
	2.4 Environmental conditions	6
	2.5 Ordering information	6
3	FUNCTIONAL DESCRIPTION	7
	3.1 Pin out	7
	3.2 Pin description and operational characteristics	7
	3.2.1 GPIO supply voltage - IOVDD	8
	3.3 Absolute maximum ratings (non operating)	8
	3.4 Maximum ratings (operating)	8
	3.5 System environment	8
	3.6 Serial Interface	9
	3.7 Built-in Repeater	10
	3.8 Smart Acknowledge	10
	3.9 Remote Management	10
4	APPLICATIONS INFORMATION	11
	4.1 Transmission range	11
	4.2 Antenna options	12
	4.2.1 Overview	12
	4.2.2 Whip antenna	12
	4.3 Recommendations for laying a whip antenna	13
	4.4 Power supply requirements	14
	4.5 Layout recommendations	14
	4.5.1 Recommended foot pattern	15
	4.6 Soldering information	18
	4.7 Tape & Reel specification	19
5	AGENCY CERTIFICATIONS	20
	5.1 CE approval	20
	5.2 FCC (United States) Certification	21
	5.3 IC (Industry Canada) Certification	24

1 RELATED DOCUMENTS

This document describes operation of TCM 310 / 310C modules with their built-in firmware.

In addition we recommend following our [application notes](#), in particular

- AN101: Power Supply Layout – Layout considerations for Line-Power
- AN102: Antenna Basics – Basic Antenna Design Considerations for EnOcean based Products
- AN105: 315 MHZ Internal Antenna Design – Considerations for EnOcean based Products

The specification of the serial protocol ESP3 can be found here:

http://www.enocean.com/en/enocean_modules/tcm-310/

2 GENERAL DESCRIPTION

2.1 Basic functionality

TCM 310 enables the realization of gateways for the EnOcean 868 MHz and 315 MHz radio systems. It provides a bi-directional radio interface at one end and a bi-directional serial interface at the other end. Radio messages are sent transparently through the serial interface in both directions from and to an externally connected host processor or host PC. In addition control commands can be sent from the host, e.g. to configure the repeater functionality or to manage the Smart Ack functions. TCM 310 can act as postmaster for up to 20 bi-directional sensors using Smart Ack technology.



Features

- Smart Ack controller functionality
- Transparent radio channel
- Programmable repeater functionality (1 / 2 Level)
- ESP3 support (EnOcean Serial Protocol V3)
- Not API programmable!

Product variants


- TCM 310/310C: SMD mountable module for use with external antenna (868/315 MHz)

TCM 310 / 310C

2.2 Technical data

Antenna	External whip or 50 Ω antenna mountable
Frequency	315.0 MHz (TCM 310C) / 868.3 MHz (TCM 310)
Radio Standard	EnOcean 868 MHz/315 MHz
Data rate/Modulation type	125 kbps/ASK
Receiver Sensitivity (at 25°C)	typ. -96 dBm ¹ (868 MHz) typ. -98 dBm ¹ (315 MHz)
Conducted Output Power	typ. 3 dBm
Power Supply	2.6 V...3.5 V
Start-up time from OFF mode	<500 ms
Start-up time from SLEEP mode	<10 ms
Serial Interface	UART
Current Consumption	Receive mode: typ. 33 mA, max. 43 mA (RX) Transmit mode: typ. 24 mA, max. 33 mA (TX) Deep sleep mode: typ. 0.2 μ A
Radio Regulations	R&TTE EN 300 220 (TCM 310) FCC CFR-47 Part 15 (TCM 310C)

2.3 Physical dimensions

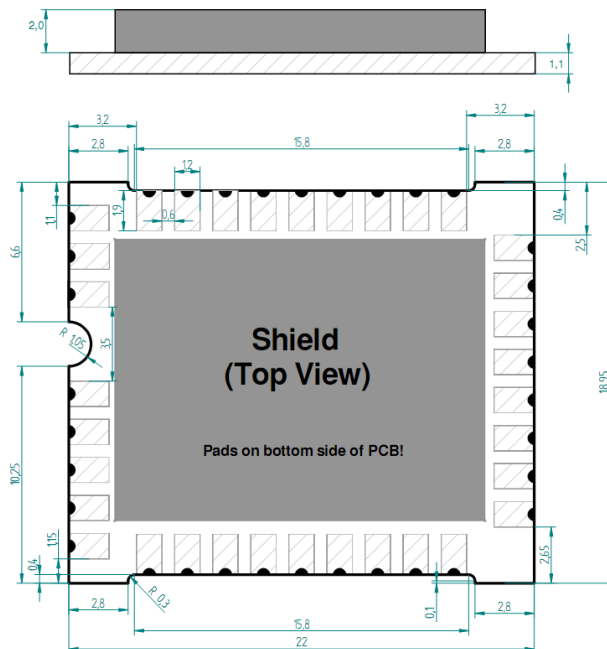

Unless otherwise specified dimensions are in mm.

Tolerances:

PCB outline dimensions ± 0.2 mm

All other tolerances ± 0.1 mm

TCM 310 / TCM 310C (pads on bottom side of PCB!)

PCB Dimension	22 x 19 x 3.1 mm
Weight	1.9 g

¹ @ 0.1% telegram error rate (based on 3 transmitted sub-telegrams)

2.4 Environmental conditions


Operating temperature	-0 °C ... +65 °C
Storage temperature	-40 °C ... +85 °C
Storage temperature in tape & reel package	-20 °C ... +50 °C
Humidity	0% ... 93% r.H., non-condensing

2.5 Ordering information

Type	Ordering Code	Frequency
TCM 310	S3003-K310	868.3 MHz
TCM 310C	S3033-K310	315.0 MHz

3 FUNCTIONAL DESCRIPTION

3.1 Pin out

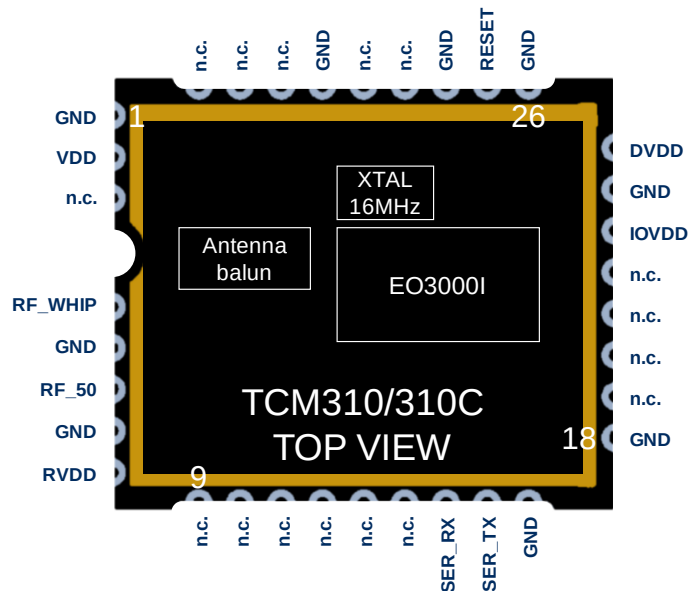

The figure above shows the pin out of the TCM 310 hardware.

3.2 Pin description and operational characteristics

HW Symbol	Pin #	Function	Characteristics
GND	1, 5, 7, 17, 18, 24, 26, 28, 31	Ground connection	Must be connected to GND; see 4.4
VDD	2	Supply voltage	2.6 V ... 3.5 V
RVDD	8	RF supply voltage regulator output	Leave open
DVDD	25	Digital supply voltage regulator output	1.8 V Output current: max. 5 mA
IOVDD	23	GPIO supply voltage	Must be connected to desired interface supply voltage (see 3.4) See also 3.2.1.
RESET	27	Reset input	External 10 kΩ pull-down required.
SER_RX	15	UART input	See 3.6
SER_TX	16	UART output	See 3.6
RF_WHIP	4	RF output	Output for whip antenna
RF_50	6	RF output	50 Ohm output for external antenna
n.c.	3, 9-14, 19-22, 29,30, 32-34	Not connected	Do not connect!

3.2.1 GPIO supply voltage - IOVDD

For digital communication with other circuitry the pins of the serial interface UART may be operated from supply voltages different from DVDD. Therefore an interface voltage supply pin IOVDD is available which must be connected either to DVDD or to an external supply within the tolerated voltage range of IOVDD.



If DVDD=0 V (e.g. in any sleep mode or if VDD<VOFF) and IOVDD is supplied, there may be unpredictable and varying current from IOVDD caused by internal floating nodes. It must be taken care that the current into IOVDD does not exceed 10 mA while DVDD=0 V. If DVDD=0 V and IOVDD is not supplied, do not apply voltage to any above mentioned pin. This may lead to unpredictable malfunction of the device.



IOVDD voltage must not exceed VDD voltage! A malfunction of the module may be caused by such inverse supply!

3.3 Absolute maximum ratings (non operating)


Symbol	Parameter	Min	Max	Units
VDD	Supply voltage at VDD	-0.5	5.5	V
IOVDD	GPIO supply voltage	-0.5	3.6	V
GND	Ground connection	0	0	V
VIND1	Voltage at RESET, and UART	-0.5	3.6	V

3.4 Maximum ratings (operating)

Symbol	Parameter	Min	Max	Units
VDD	Supply voltage at VDD TCM 310	2.6	3.5	V
IOVDD	GPIO supply voltage (see also 3.2.1)	1.7	3.6	V
GND	Ground connection	0	0	V
VIND1	Voltage at RESET, and UART	0	3.6	V
VDDR	Max. ripple at VDD		50	mVpp

3.5 System environment

In the figure below, TCM 310 is shown in a typical system environment.

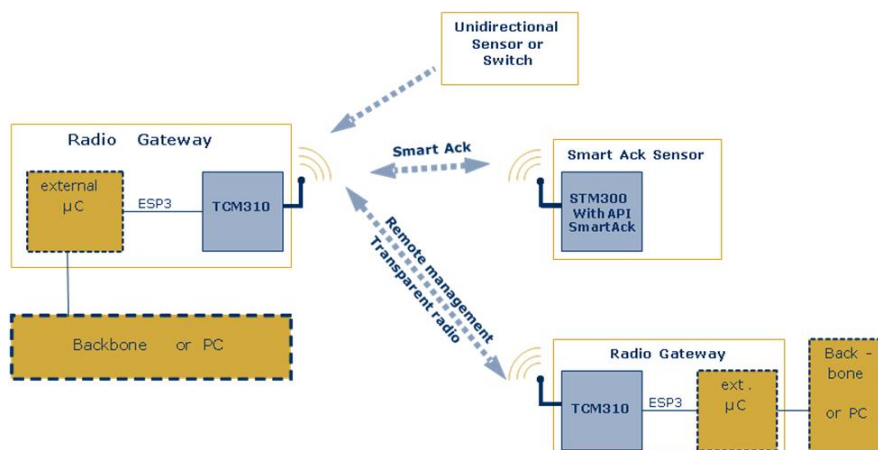

3.6 Serial Interface

TCM 310 provides a bi-directional serial interface which conforms to the ESP3 specification. For details regarding ESP3 please refer to the ESP3 specification². The data rate on the serial interface is 58.8 kbit/s which is usually interoperable with systems running at 57.6 kbit/s.

Direction	Nominal serial data rate	Tolerance
TX (sent by module)	58823 bit/s (=57600 bit/s + 2.1%)	< 50 ppm
RX (received by module)	58823 bit/s	< 5%

The following ESP3 commands are supported:

- Type 1 Radio command for transparent mode
- Type 2 Responses
- Type 4 Event
 - SA_CONFIRM_LEARN to confirm/discard learn in/out
 - CO_READY to indicate wake up from deep sleep initiated by CO_WR_SLEEP
- Type 5 Common commands
 - CO_WR_SLEEP to enter energy saving mode (deep sleep mode)
 - CO_WR_RESET to reset the device
 - CO_RD_VERSION to read SW/HW versions, chip ID etc.
 - CO_RD_SYS_LOG to read system log from device data base
 - CO_WR_SYS_LOG to reset system log from device data base
 - CO_WR_BIST to perform flash BIST operation
 - CO_WR_IDBASE to write ID range base number
 - CO_RD_IDBASE to read ID range base number
 - CO_WR_REPEATER to configure repeater functionality
 - CO_RD_REPEATER to read repeater state
 - CO_WR_FILTER_ADD to add filter to filter list (up to 30 filters are supported)
 - CO_WR_FILTER_DEL to delete filter from filter list
 - CO_WR_FILTER_DEL_ALL to delete all filter
 - CO_WR_FILTER_ENABLE to enable/disable supplied filters
 - CO_RD_FILTER to read supplied filters
 - CO_WR_WAIT_MATURITY to wait maturity time before returning radio telegrams
 - CO_WR_MEM for writing into memory
 - CO_RD_MEM for reading memory
 - CO_RD_MEM_ADDRESS to get addresses of special areas
- Type 6 Smart Acknowledge commands
 - SA_WR_LEARNMODE to set/reset Smart Acknowledge learn mode
 - SA_RD_LEARNMODE to get learn mode
 - SA_WR_LEARNCONFIRM to add or delete a mailbox of a client
 - SA_WR_RESET to send a reset command to a client
 - SA_RD_LEARNEDCLIENTS to get learned mailboxes/clients
 - SA_WR_POSTMASTER to activate/deactivate post master functionality
- Type 7 Remote Management messages up to 256 Bytes

² http://www.enocean.com/en/enocean_modules/tcm-300/



All configuration values set via ESP3 commands are held in RAM and will therefore be lost after RESET or after a deep sleep phase. Only Smart Ack mailboxes are stored in FLASH and are available also after RESET or a deep sleep phase.



After sending a CO_WR_RESET command, the following CO_READY event indicates wake up reason 06 meaning "A memory request from the CPU core does not correspond to any valid memory location." This is caused by the real reset cause used when CO_WR_RESET will be performed. It is not a SW/HW malfunction.

3.7 Built-in Repeater

TCM 310 provides the option to activate a one or two-level repeater for EnOcean radio telegrams.

1-level repeater: If a received telegram is a valid and original (not yet repeated), the telegram is repeated after a random delay.

2-level repeater: If a received telegram is valid and original or repeated once, the telegram is repeated after a random delay.



2-level repeating function should only be activated if really needed! Otherwise the system function can be compromised by collisions of telegrams.

The repeated telegram is marked as "repeated" by an increased repeater counter. Configuration of the repeater is done via serial interface commands.

For detailed recommendations regarding the usage of repeaters please refer to our application note [EnOcean Wireless Systems - Installation Notes \(PDF\), 09/2010](#).

3.8 Smart Acknowledge

TCM 310 provides a post master function with 20 mailboxes for sensors using Smart Ack technology. For more information on smart acknowledge please refer to [EnOcean Equipment Profiles \(EEP\) V2.1](#).



When teaching-in a device using Smart Acknowledge please take care to switch off all TCM 3xy devices which are not continuously powered. Otherwise these TCM 3xy modules could be declared postmaster. As soon as the power supply is switched off, a postmaster would be missing and Smart Acknowledge would not work any longer!

3.9 Remote Management

TCM 310 provides a transparent radio channel also for remote management messages with a message length of up to 256 bytes. This enables an external micro controller connected to TCM 310 to handle remote management request from external devices or to control other devices via remote management. For more information on remote management please refer to [EnOcean Equipment Profiles \(EEP\) V2.1](#).

4 APPLICATIONS INFORMATION

4.1 Transmission range

The main factors that influence the system transmission range are type and location of the antennas of the receiver and the transmitter, type of terrain and degree of obstruction of the link path, sources of interference affecting the receiver, and “dead” spots caused by signal reflections from nearby conductive objects. Since the expected transmission range strongly depends on this system conditions, range tests should categorically be performed before notification of a particular range that will be attainable by a certain application.

The following figures for expected transmission range are considered by using a PTM, a STM or a TCM radio transmitter device and the TCM radio receiver device with preinstalled whip antenna and may be used as a rough guide only:

- Line-of-sight connections: Typically 30 m range in corridors, up to 100 m in halls
- Plasterboard walls / dry wood: Typically 30 m range, through max. 5 walls
- Line-of-sight connections: Typically 30 m range in corridors, up to 100 m in halls
- Ferro concrete walls / ceilings: Typically 10 m range, through max. 1 ceiling
- Fire-safety walls, elevator shafts, staircases and supply areas should be considered as screening.

The angle at which the transmitted signal hits the wall is very important. The effective wall thickness – and with it the signal attenuation – varies according to this angle. Signals should be transmitted as directly as possible through the wall. Wall niches should be avoided. Other factors restricting transmission range:

- Switch mounted on metal surfaces (up to 30% loss of transmission range)
- Hollow lightweight walls filled with insulating wool on metal foil
- False ceilings with panels of metal or carbon fibre
- Lead glass or glass with metal coating, steel furniture

The distance between EnOcean receivers and other transmitting devices such as computers, audio and video equipment that also emit high-frequency signals should be at least 0.5 m

A summarized application note to determine the transmission range within buildings is available as download from www.enocean.com.

4.2 Antenna options

4.2.1 Overview

Several antenna types have been investigated by EnOcean. Please refer to our application notes AN102, and AN105 which give an overview on our recommendations.

The modules have been approved with whip antenna.

868 MHz modules used in Europe do not need additional approval if the external antenna fulfils the following requirements:

Frequency band	868 MHz ISM	Antenna must be suited for this band
Antenna type	Passive	Mandatory for radio approval
Impedance	~50 Ohm	Mandatory for radio approval
Maximum gain	≤ 0 dBd	Mandatory for radio approval

In addition it is important to fulfill the following requirements in order to achieve compatibility with other EnOcean products and to ensure excellent EMI robustness:

VSWR	≤ 3:1	Important for compatibility with EnOcean protocol
Return Loss	> 6 dB	Important for compatibility with EnOcean protocol
Bandwidth	≤ 20 MHz	Important if 10 V/m EMI robustness required for device



For 315 MHz modules (TCM 310C) please note that a full approval is needed if modules are used with antennas other than the specified whip antenna.

4.2.2 Whip antenna

315 MHz

Antenna: 150 mm wire, connect to RF_WHIP

Minimum GND plane: 50 mm x 50 mm


Minimum distance space: 10 mm

868 MHz


Antenna: 86 mm wire, connect to RF_WHIP

Minimum GND plane: 38 mm x 18 mm

Minimum distance space: 10 mm

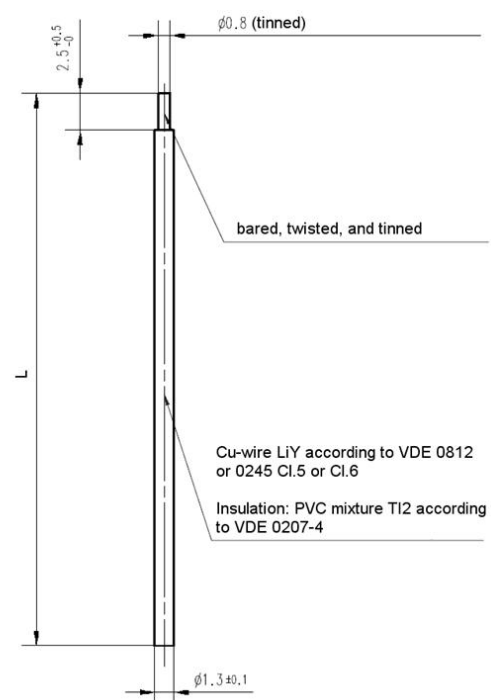

4.3 Recommendations for laying a whip antenna

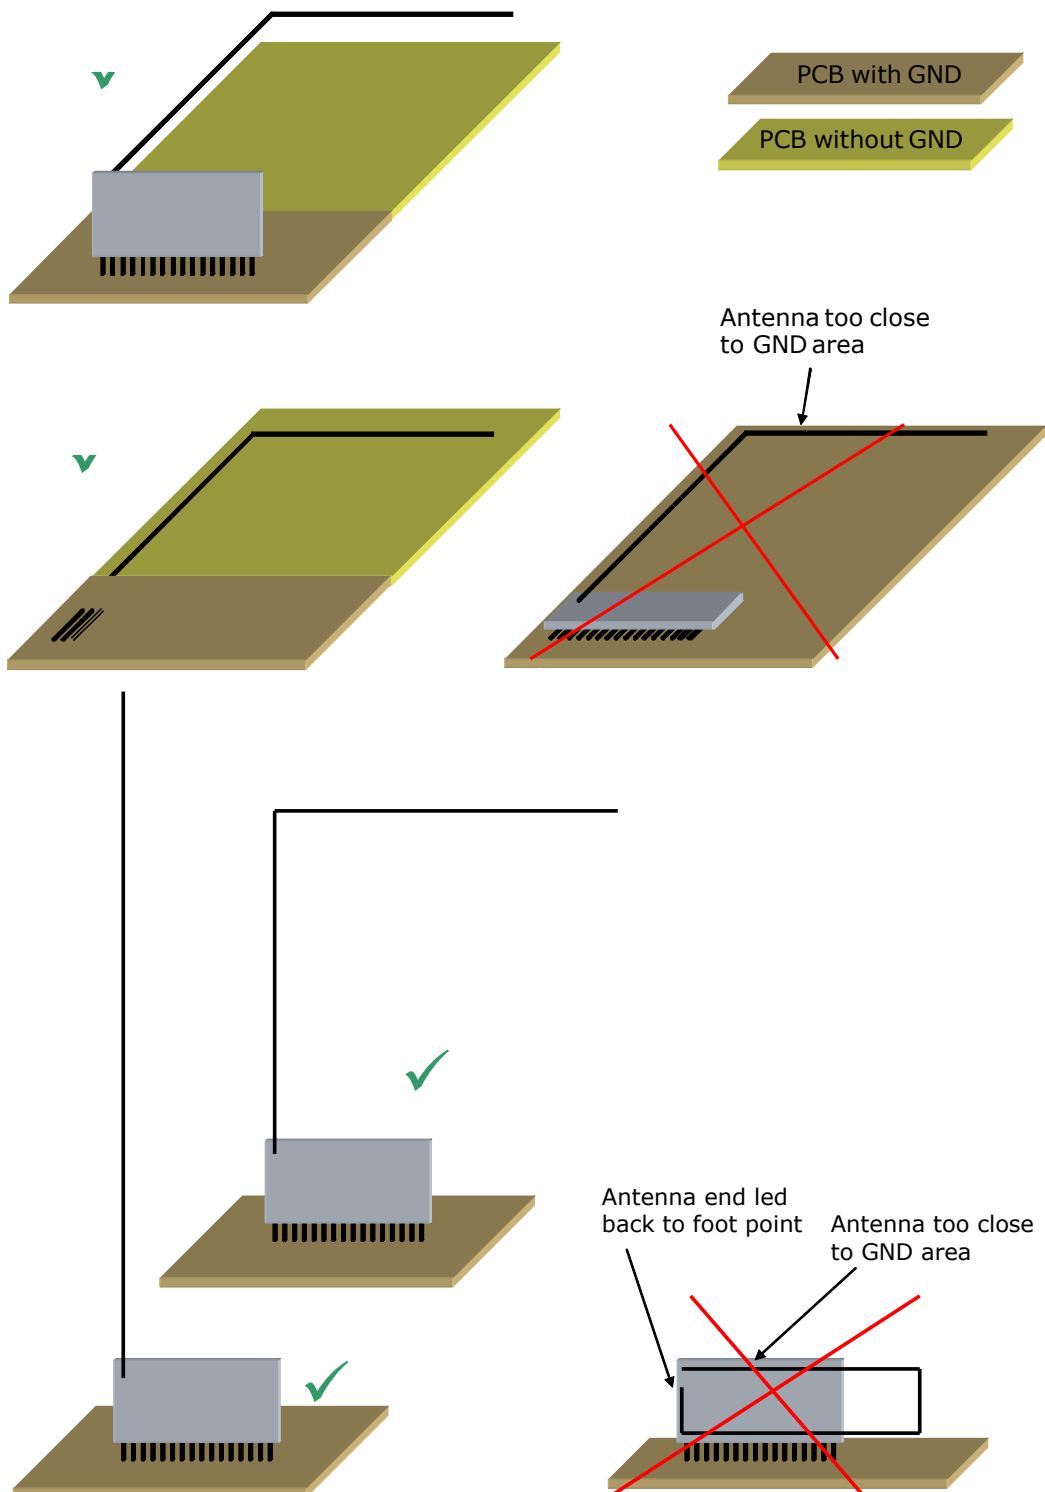

4.4 Power supply requirements

In order to provide a good radio performance, great attention must be paid to the power supply and a correct layout and shielding. It is recommended to place a 22 μ F ceramic capacitor between VDD and GND close to the module (material: X5R, X7R, min 6.3 V to avoid derating effects). In addition a 470 nH coil shall be inserted (Murata LQW18A, 0603) in the power supply line.

For best performance it is recommended to keep the ripple on the power supply rail below 10 mVpp (see 3.4).



All GND pins must be connected to GND. Be careful not to create loops! The ground must be realized ideally on both sides of the PCB board with many vias. At least there must be a short star connection. Otherwise RF performance can be reduced!

4.5 Layout recommendations



The length of lines connected to I/Os should not exceed 5 cm.



It is recommended to have a complete GND layer in the application PCB, at least in the area below the module and directly connected components (e.g. mid-layer of your application PCB).

Due to unisolated test points there are live signals accessible on the bottom side of the module.


Please follow the following advices to prevent interference with your application circuit:

- We suggest avoiding any copper structure in the area directly underneath the module (top-layer layout of your application PCB). If this is not possible in your design, please provide coating on top of your PCB to prevent short circuits to the module. All bare metal surfaces including vias have to be covered (e.g. adequate layout of solder resist).
- It is mandatory that the area marked by the circle in the figure below is kept clear of any conductive structures in the top layer and 0.3 mm below. Otherwise RF performance will be degraded!


Furthermore, any distortive signals (e.g. bus signals or power lines) should not be routed underneath the module. If such signals are present in your design, we suggest separating them by using a ground plane between module and these signal lines.

4.5.1 Recommended foot pattern


Top layer

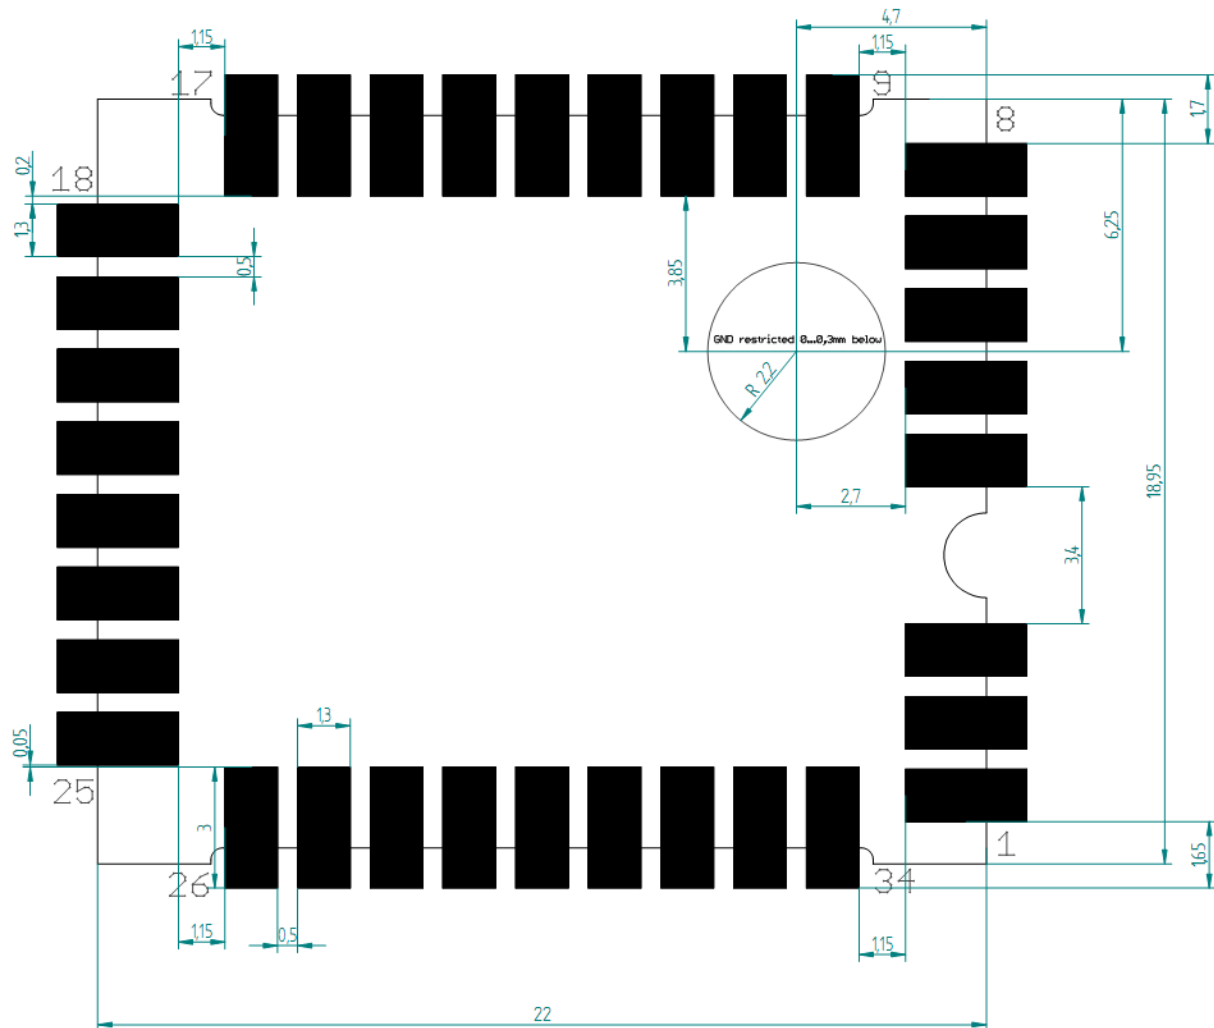

Solder resist top layer

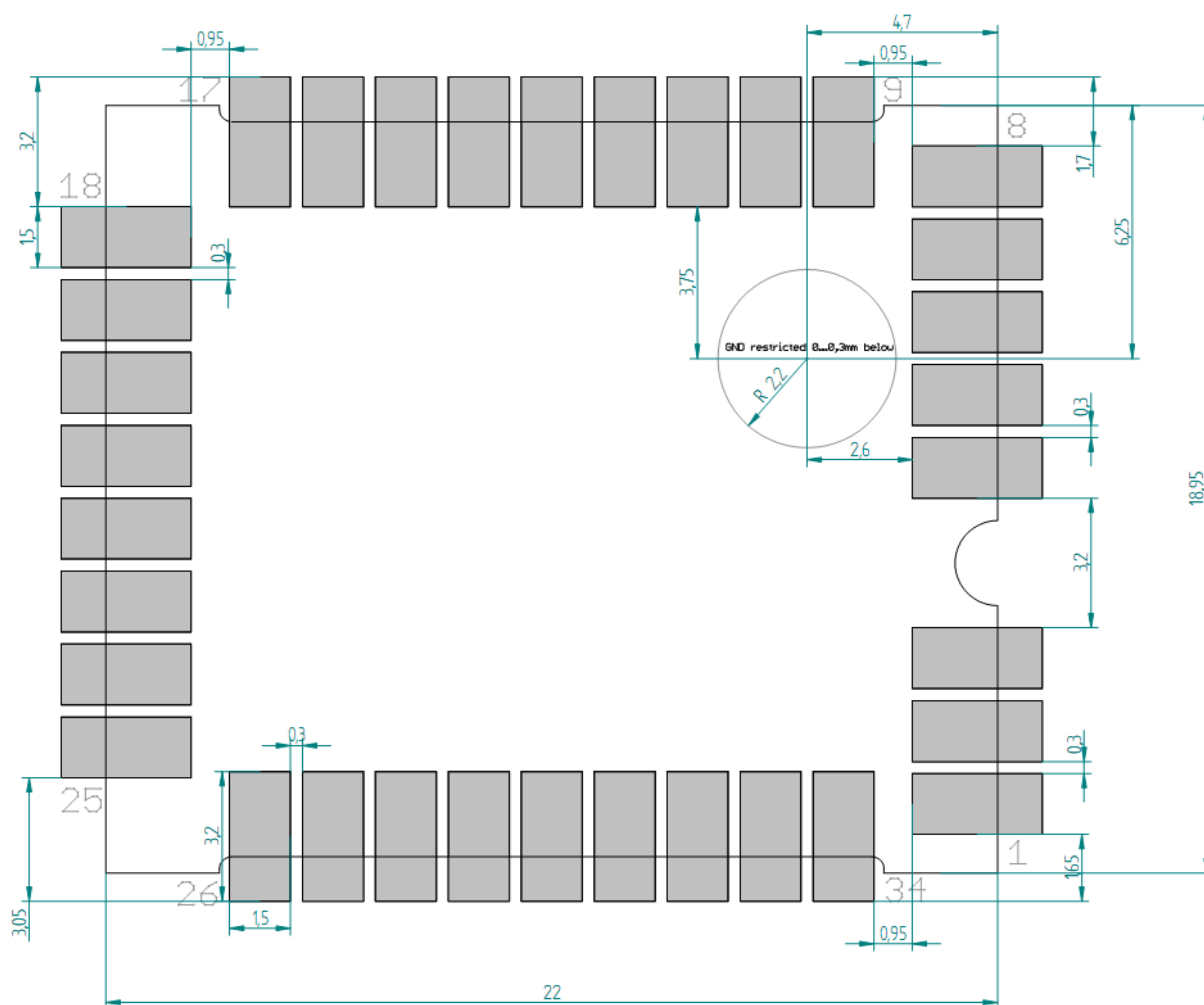

Solder paste top layer

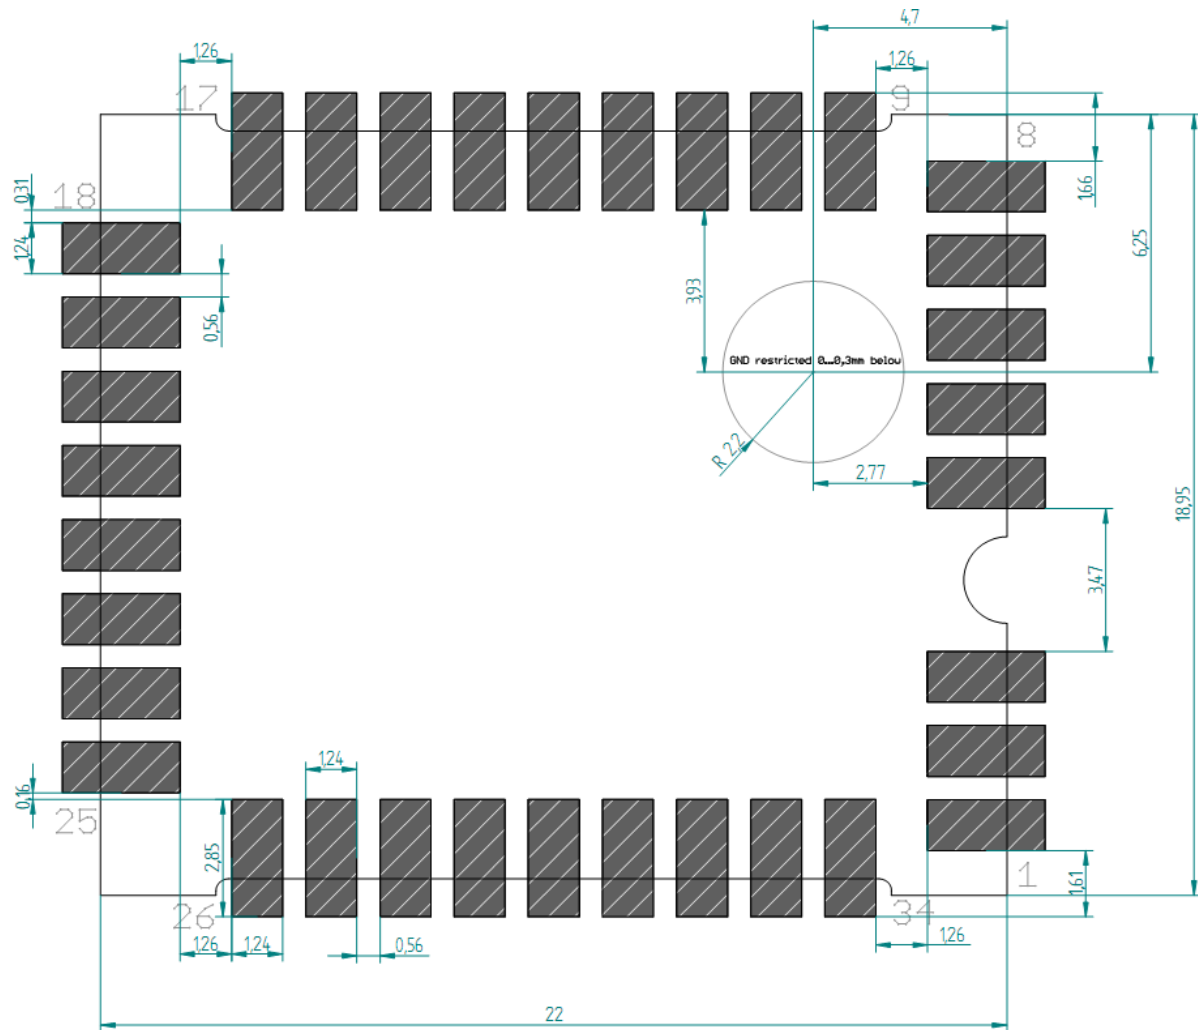

The data above is also available as EAGLE library.

In order to ensure good solder quality a solder mask thickness of 150 μm is recommended.

In case a 120 μm solder mask is used, it is recommended to enlarge the solder print. The pads on the solder print should then be 0.1 mm larger than the pad dimensions of the module as specified in chapter 2.3. (not relative to the above drawing).


Nevertheless an application and production specific test regarding the amount of soldering paste should be performed to find optimum parameters.

4.6 Soldering information

TCM 310 has to be soldered according to IPC/JEDEC J-STD-020C standard.

Profile Feature	Pb-Free Assembly
Average Ramp-Up Rate ($T_{s_{max}}$ to T_p)	3° C/second max.
Preheat	
– Temperature Min ($T_{s_{min}}$)	150 °C
– Temperature Max ($T_{s_{max}}$)	200 °C
– Time ($t_{s_{min}}$ to $t_{s_{max}}$)	60-180 seconds
Time maintained above:	
– Temperature (T_L)	217 °C
– Time (t_L)	60-150 seconds
Peak/Classification Temperature (T_p)	260 °C
Time within 5 °C of actual Peak Temperature (t_p)	20-40 seconds
Ramp-Down Rate	6 °C/second max.
Time 25 °C to Peak Temperature	8 minutes max.

Note 1: All temperatures refer to topside of the package, measured on the package body surface.

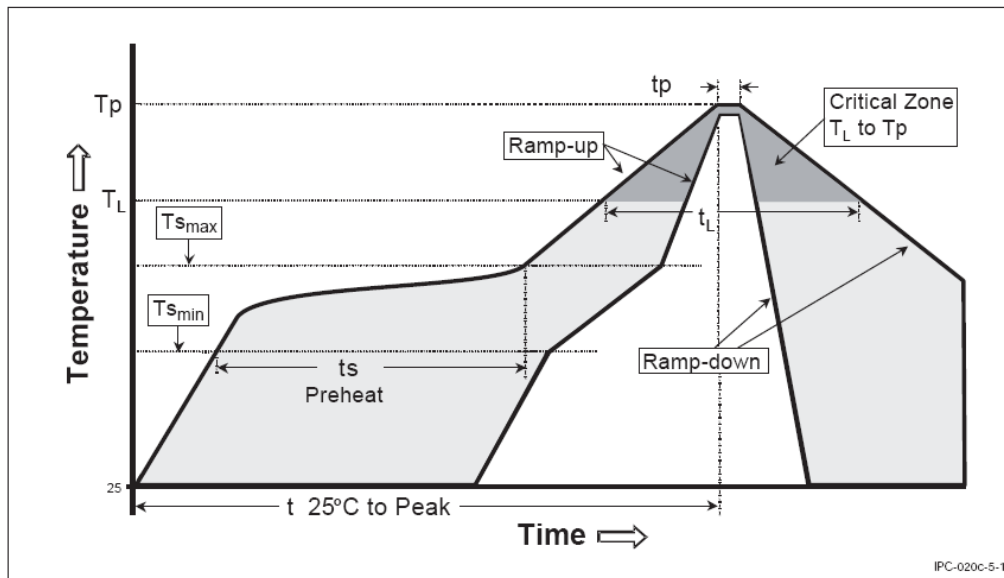


TCM 310 shall be handled according to Moisture Sensitivity Level MSL4 which means a floor time of 72 h. TCM 310 may be soldered only once, since one time is already consumed at production of the module itself.

Once the dry pack bag is opened, the desired quantity of units should be removed and the bag resealed within two hours. If the bag is left open longer than 30 minutes the desiccant should be replaced with dry desiccant. If devices have exceeded the specified floor life time of 72 h, they may be baked according IPC/JEDEC J-STD-033B at max. 90°C for less than 60 h.

Devices packaged in moisture-proof packaging should be stored in ambient conditions not exceeding temperatures of 40 °C or humidity levels of 90% r.H.

TCM 310 modules have to be soldered within 6 months after delivery!

TCM 310 / 310C

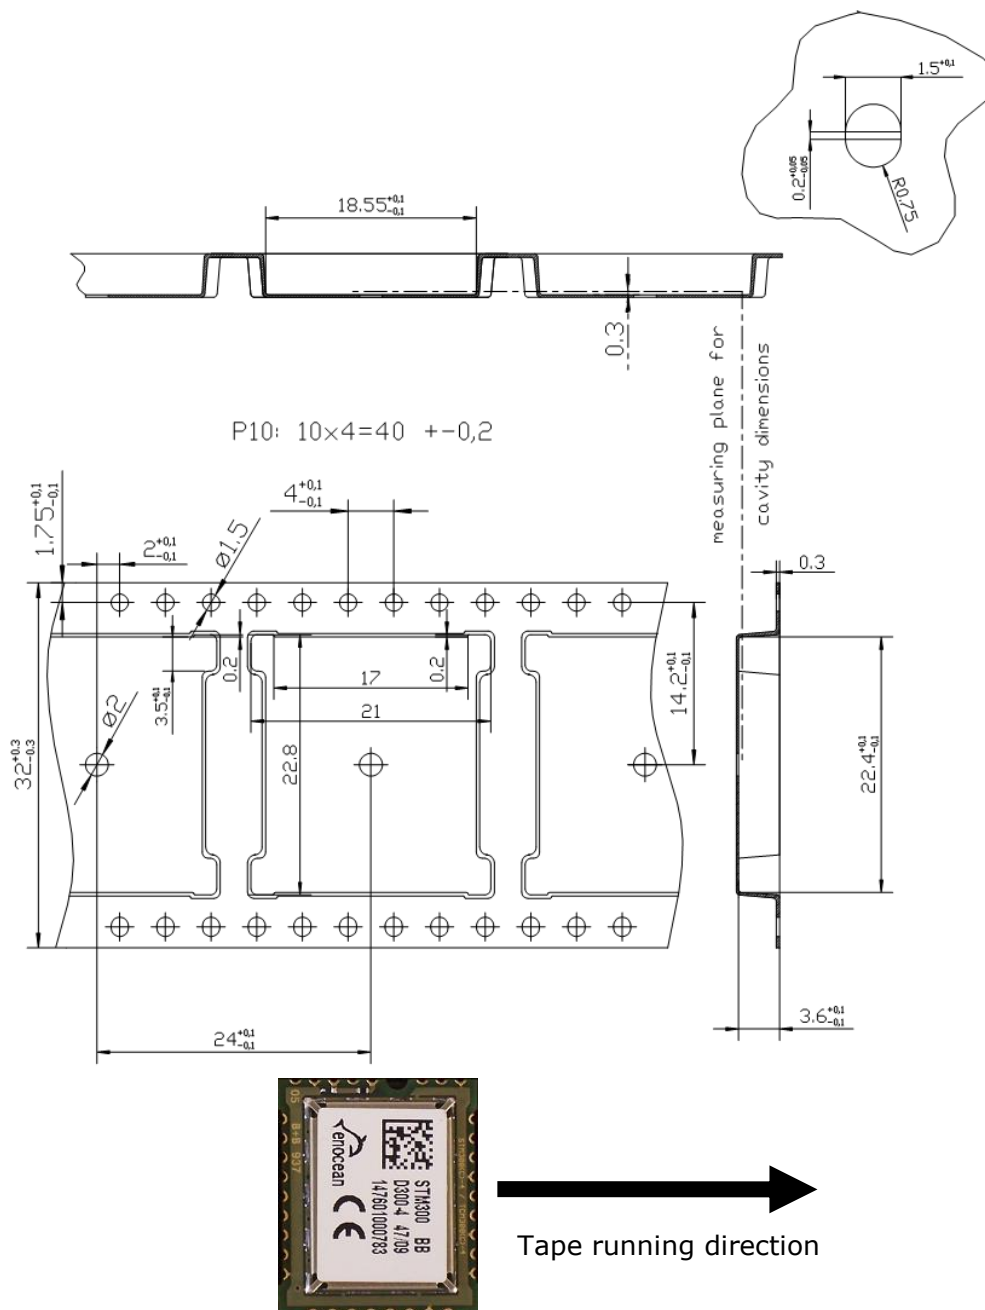4.7 Tape & Reel specification

5 AGENCY CERTIFICATIONS

The modules have been tested to fulfil the approval requirements for CE (TCM 310) and FCC/IC (TCM 310C) based on the built-in firmware.



When developing customer specific firmware based on the API for this module, special care must be taken not to exceed the specified regulatory limits, e.g. the duty cycle limitations!

5.1 CE approval

The modules bear the EC conformity marking CE and conform to the R&TTE EU-directive on radio equipment. The assembly conforms to the European and national requirements of electromagnetic compatibility. The conformity has been proven and the according documentation has been deposited at EnOcean. The modules can be operated without notification and free of charge in the area of the European Union, and in Switzerland. The following provisos apply:

- EnOcean RF modules must not be modified or used outside their specification limits.
- EnOcean RF modules may only be used to transfer digital or digitized data. Analog speech and/or music are not permitted.
- The final product incorporating EnOcean RF modules must itself meet the essential requirement of the R&TTE Directive and a CE marking must be affixed on the final product and on the sales packaging each. Operating instructions containing a Declaration of Conformity has to be attached.
- If the transmitter is used according to the regulations of the 868.3 MHz band, a so-called "Duty Cycle" of 1% per hour must not be exceeded. Permanent transmitters such as radio earphones are not allowed.
- The module must be used with only the following approved antenna(s).

Type	Parameter	Value
Wire/Monopole at RF_WHIP	Maximum gain	1.0 dBi
External antenna at RF_50	Antenna type	Passive
	Impedance	~50 Ohm
	Maximum gain	≤ 0 dBd

5.2 FCC (United States) Certification

LIMITED MODULAR APPROVAL

This is an RF module approved for Limited Modular use operating as an intentional transmitting device with respect to 47 CFR 15.231(a-c) and is limited to OEM installation. The module is optimized to operate using small amounts of energy, and may be powered by a battery. The module transmits short radio packets comprised of control signals, (in some cases the control signal may be accompanied with data) such as those used with alarm systems, door openers, remote switches, and the like. The module does not support continuous streaming of voice, video, or any other forms of streaming data; it sends only short packets containing control signals and possibly data. The module is designed to comply with, has been tested according to 15.231(a-c), and has been found to comply with each requirement. Thus, a finished device containing the TCM 310C radio module can be operated in the United States without additional Part 15 FCC approval (approval(s) for unintentional radiators may be required for the OEM's finished product), under EnOcean's FCC ID number. This greatly simplifies and shortens the design cycle and development costs for OEM integrators. The module can be triggered manually or automatically, which cases are described below.

Manual Activation

The radio module can be configured to transmit a short packetized control signal if triggered manually. The module can be triggered, by pressing a switch, for example.

The packet contains one (or more) control signals that is (are) intended to control something at the receiving end. The packet may also contain data. Depending on how much energy is available from the energy source, subsequent manual triggers can initiate the transmission of additional control signals. This may be necessary if prior packet(s) was (were) lost to fading or interference. Subsequent triggers can also be initiated as a precaution if any doubt exists that the first packet didn't arrive at the receiver. Each packet that is transmitted, regardless of whether it was the first one or a subsequent one, will only be transmitted if enough energy is available from the energy source.

Automatic Activation

The radio module also can be configured to transmit a short packetized control signal, if triggered automatically, by a relevant change of its inputs or in response to receiving a signal from another transmitter, for example. Again, the packet contains a control signal that is intended to control something at the receiving end and may also contain data. As above, it is possible for the packet to get lost and never reach the receiver. However, if enough energy is available from the energy source, and the module has been configured to do so, then another packet or packets containing the control signal may be transmitted at a later time.

The device is capable to operate as a repeater, which can receive signals from the following list of FCC/IC approved transmitters, and retransmit the signals.

■ PTM 200C	FCC ID:SZV-PTM200C	IC:5713A-PTM200C
■ STM 110C	FCC ID:SZV-STM110C	IC:5713A-STM110C
■ TCM 200C	FCC ID:SZV-TCM2XXC	IC:5713A-TCM2XXC
■ TCM 220C	FCC ID:SZV-TCM2XXC	IC:5713A-TCM2XXC
■ TCM 300C	FCC ID:SZV-STM300C	IC:5713A-STM300C
■ TCM 310C	FCC ID:SZV-STM300C	IC:5713A-STM300C
■ STM 300C	FCC ID:SZV-STM300C	IC:5713A-STM300C
■ TCM 320C	FCC ID:SZV-TCM320C	IC:5713A-TCM320C

OEM Requirements

In order to use EnOcean's FCC ID number, the OEM must ensure that the following conditions are met:

- End users of products, which contain the module, must not have the ability to alter the firmware that governs the operation of the module. The agency grant is valid only when the module is incorporated into a final product by OEM integrators.
- The end-user must not be provided with instructions to remove, adjust or install the module.
- The Original Equipment Manufacturer (OEM) must ensure that FCC labeling requirements are met. This includes a clearly visible label on the outside of the final product. Attaching a label to a removable portion of the final product, such as a battery cover, is not permitted. The label must include the following text:

Contains FCC ID: SZV-STM300C

The enclosed device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (i.) this device may not cause harmful interference and (ii.) this device must accept any interference received, including interference that may cause undesired operation.

When the device is so small or for such use that it is not practicable to place the statement above on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

The user manual for the end product must also contain the text given above.

- Changes or modifications not expressly approved by EnOcean could void the user's authority to operate the equipment.
- The module must be used with only the following approved antenna(s).

Part Number	Type	Gain
N.A.	Wire/Monopole	1.0 dBi

- The OEM must ensure that timing requirements according to 47 CFR 15.231(a-c) are met.
- The OEM must sign the OEM Limited Modular Approval Agreement with EnOcean

TCM 310 / 310C

TCB

GRANT OF EQUIPMENT
AUTHORIZATION

Certification
Issued Under the Authority of the
Federal Communications Commission
By:

TCB

PHOENIX TESTLAB GmbH
Koenigswinkel 10
D-32825 Blomberg,
Germany

Date of Grant: 04/07/2010

Application Dated: 04/07/2010

EnOcean GmbH
Kolpingring 18a
Oberhaching, 82041
Germany

Attention: Armin Anders, Director Product Marketing

NOT TRANSFERABLE

EQUIPMENT AUTHORIZATION is hereby issued to the named GRANTEE, and is
VALID ONLY for the equipment identified hereon for use under the Commission's
Rules and Regulations listed below.

FCC IDENTIFIER: SZV-STM300C

Name of Grantee: EnOcean GmbH

Equipment Class: Part 15 Remote Control/Security Device

Transceiver
Notes: Transceiver Module

Modular Type: Limited Single Modular

Grant Notes

FCC Rule Parts
15.231

Frequency
Range (MHz)
315.0 - 315.0

Output
Watts

Frequency
Tolerance

Emission
Designator

The only antennas approved for use with this module are those documented in the filing,
and must be installed in the manner specified therein.



5.3 IC (Industry Canada) Certification

In order to use EnOcean's IC number, the OEM must ensure that the following conditions are met:

- Labeling requirements for Industry Canada are similar to those required by the FCC. The Original Equipment Manufacturer (OEM) must ensure that IC labeling requirements are met. A clearly visible label on the outside of a non-removable part of the final product must include the following text:

Contains IC: 5713A-STM300C

- The OEM must sign the OEM Limited Modular Approval Agreement with EnOcean

 TECHNICAL APPROVAL CERTIFICATE based on the Agreement on Mutual Recognition between the European Community and Canada		CERTIFICAT D'APPROBATION TECHNIQUE en se basant l'accord de reconnaissance mutuelle entre la Communauté Européenne et le Canada	
CERTIFICATE NUMBER NUMÉRO DE CERTIFICAT	10-110676		
CERTIFICATION NUMBER NUMÉRO DE CERTIFICATION	IC: 5713A-STM300C		
TYPE OF SERVICE TYPE DE SERVICE	NEW FAMILY CERTIFICATION / LIMITED MODULAR APPROVAL		
CERTIFICATE HOLDER TITULAIRE DU CERTIFICAT	EnOcean GmbH Kolpingring 18a 82041 Oberhaching Germany		
TYPE OF EQUIPMENT GENRE DE MATÉRIEL	Transceiver Module		
TRADE NAME AND MODEL NUMBER MARQUE ET NUMÉRO DE MODÈLE	EnOcean	TCM300C / STM300C	
FREQUENCY RANGE BANDE DE FRÉQUENCES	315MHz		
EMISSION DESIGNATION (TRC-43) DÉSIGNATION D'ÉMISSION (CRT-43)	373KA1D		
R.F. POWER RATING (WATT) PUISSANCE NOMINALE H.F. (WATT)	/		
ANTENNA INFORMATION INFORMATION D'ANTENNE	Wire Antenna 15cm		
CONTACT INFORMATION OF TESTING LABORATORY COORDONNÉES DU LABORATOIRE D'ESSAI	Pkm electronic GmbH Ohmstrasse 1 84160 Frontenhausen Germany		
CERTIFIED TO CERTIFIÉ SELON LE	SPECIFICATION / ISSUE CAHIER DES CHARGES / ÉDITION	RSS-210 Issue 7, RSS-GEN Issue 2 RSS-102 Issue 4	
Certification of equipment means only that the equipment has met the requirements of the above noted specification. License applications, where applicable to use certified equipment, are acted on accordingly by the issuing office and will depend on the existing radio environment, service and location of operation. This certificate is issued on condition that the holder complies and will continue to comply with the requirements of the radio standards specifications and procedures issued by the Department. La certification du matériel signifie seulement que le matériel a satisfait aux exigences de la norme indiquée ci-dessus. Les demandes de licences nécessaires pour l'utilisation du matériel certifié sont traitées en conséquence par le bureau de délivrance et dépendent des conditions radio ambiantes, du service et de l'emplacement d'exploitation. Le présent certificat est délivré à la condition que le titulaire satisfasse et continue de satisfaire aux exigences aux procédures d'Industry Canada.			
Labeling of Certified Radio Equipment: Equipment that has received certification but is not labelled with the applicant's name, model number and the certification number as outlined above is not considered certified. Étiquetage du matériel radio homologué: Le matériel pour lequel une certification a été obtenue mais qui n'est pas étiqueté conformément aux exigences ci-dessus (nom du requérant, numéro de modèle et numéro de certification) n'est pas considéré comme certifié.			
Certification Body Code: DE0003	 recognised by Bundesnetzagentur	 Signed by / Signataire Uwe Dollitz	
Blomberg, 07 April 2010		Foreign Certification Body (FCB)	
Blomberg-CAB-04/22-53			

PHOENIX TESTLAB GmbH • Königswinkel 10 D-32825 Blomberg, Germany • Phone: +49 (0)5235-9500-0 • Fax: +49 (0) 5235-9500-10
<http://www.phoenix-testlab.de>

